




XVR Dahua 16 Canali Hdcvi 5M-N Wizsense AI

Descrizione

WizSense XVR5116HS-I3 Dahua XVR 16 Canali Hdcvi 1080P TVI Analogico 5in1 con risoluzione fino a **5M-N/1080P** e compressione video fino a **H.265+**. 1 HDMI (fino 4k), 1 VGA, 2 USB, RS485, supporto per 1HDD SATA 3,5? Audio (max 16TB.), Audio. Con **intelligenza Artificiale, Tecnologia IoT e Video Analisi**

Dimensioni:

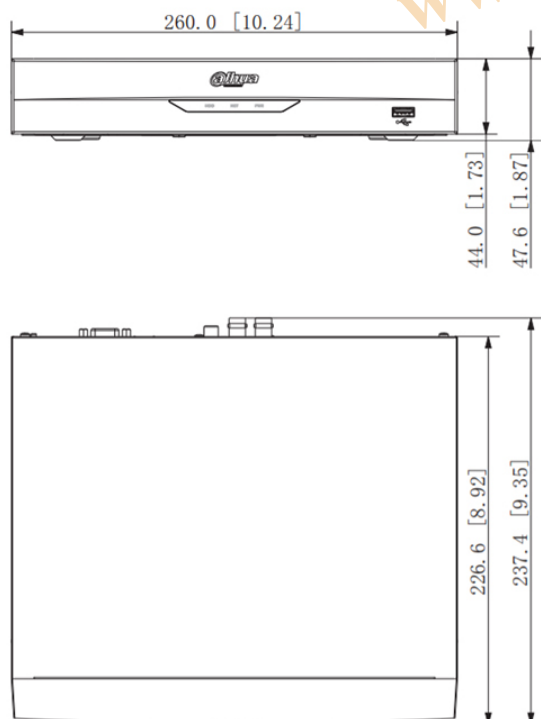

Scheda tecnica

Model: DVR	XVR5116HS-I3
SYSTEM	
Main Processor	Embedded processor
Operating System	Embedded LINUX
PERIMETER PROTECTION	
Performance	2 channels
FACE DETECTION	
Face Attributes Performance of AI by Recorder (Number of Channels)	6 attributes: Gender, age groups (6), glasses, expressions (8), face mask, beard, with up to four detection panels displayed at the same time
Face Database Capacity	Up to 10 face databases and 10,000 pictures
Face Recognition Performance of AI by Recorder (Number of Channels)	2 channels
SMD PLUS	
VIDEO AND AUDIO SMD Plus by Recorder	Full-channel SMD Plus (AI by recorder), secondary filtering for human and motor vehicle SMD Plus, reducing false alarms caused by leaves, rain and lighting condition change
Page 2	

Analog Camera Input	16 channels, BNC: adaptive access by default; HDCVI, AHD, TVI and CVBS access can be configured.
IP Camera Input Camera Input	1. CVI: 5MP, 4MP, 1080p@25/30 fps, 720p@50/60 fps, 720p@25/30 fps. 2. TVI: 5MP, 4MP, 3MP, 1080p@25/30, 720p@25/30 16 channels, PAL/NTSC, 1080p@25/30, 720p@25/30 fps.
Encoding Capacity Dual-stream	All channel 5M-N (1 fps–10 fps); 4M-N/1080p (1 fps– 15fps); 1080N/720p/960H/D1/CIF (1fps–25/30 fps) Supported (D1/CIF (1 fps–15 fps))
Video Frame Rate	PAL: 1 fps–25 fps. NTSC: 1 fps–30 fps
Video Bit Rate	32 Kbps–6144 Kbps Per Channel
Audio Sampling	8 KHz, 16 bit Per Channel
Audio Bit Rate	64 Kbps Per Channel
Bit Rate Type	Video stream and composite stream.
Video Output	1 HDMI ,1 VGA VGA: 1920 × 1080, 1280 × 1024, 1280 × 720 HDMI: 3840 × 2160, 1920 × 1080, 1280 × 1024, 1280 × 720 It changes to 1920 × 1080, 1280 × 1024, 1280 × 720 when Face or IVS&SMD is selected in AI Mode.
Multi-screen Display Third-party Camera Access	When IP extension mode not enabled: 1/4/8/9/16 When IP extension mode enabled: 1/4/8/9/16/25 Onvif, RTSP, Panasonic, Sony, Axis, Arecont, Pelco, Canon, Samsung;
Page 3	

Video Compression	AI Coding/H.265+/H.265/H.264+/H.264
Audio Compression	G.711A/G.711u/PCM
NETWORK	
Network Protocol	HTTP, HTTPS, TCP / IP, IPv4, RTSP, UDP, SMTP, NTP, DHCP, DNS, DDNS, P2P
Mobile Phone Access	iPhone, iPad, Android
Interoperability	ONVIF® 16.12, CGI Conformant
Browser	Chrome, IE9 or above, Firefox
Network Mode	Single-address mode
RECORDING PLAYBACK	
Record Mode	Manual, Schedule (General, Continuous), MD (Video detection: Motion Detection, Video Loss, Tampering), Alarm, Stop
Recording Playback	1/4/9/16 It changes to 1/4/9 split when Face or IVS&SMD is selected in AI Mode.
Backup Method	USB Device/Network
Playback Mode	Instant playback, general playback, event playback, tag playback, smart playback (face and motion detection)
ALARM	
General Alarm	Motion detection, Video Loss, tampering, and local alarm
Anomaly Alarm	No disk, disk error, low space, offline, ip conflict, MAC conflict

Intelligent Alarm	Face detection, face recognition, perimeter protection
Alarm Linkage	Record, snapshot (panoramic), IPC external alarm output, access controller, voice prompt, buzzer, log, preset, email
PORTS	
Audio Input	1, RCA (external) 16, BNC (coaxial)
Audio Output	1, RCA
Two-way Talk	Yes (share the same audio input with the first channel)
HDD interface	1 SATA Port, up to 16TB for a single HDD, the maximum HDD capacity varies with environment temperature
RS-485	1 Port, for PTZ Control
USB	2 USB Ports (1 USB 2.0 , 1 USB 3.0)
HDMI	1
VGA	1
Network Port	1 (10/100/1000 Mbps Ethernet port, RJ-45)
GENERAL	
Power Supply	DC12V, 2A
Power Consumption	Lower than 12 W
Net Weight	1.17 kg (2.58 lb)
Gross Weight	1.57 kg (3.46 lb)

Product Dimensions	Compact 1U, 260.0 mm × 237.4 mm × 47.6mm (W × D × H) 10.24? × 9.35? × 1.87? (W × D × H)
Operating Temperature	33.0 mm × 89.0 mm × 15.0 mm (L × W × H)
Packaging Dimensions	13.11? × 3.50? × 12.40? (L × W × H)
Operating Humidity	10%–90%
Installation	Desktop

www.saisystem.it

www.saisystem.it

www.saisystem.it