




## XVR DVR 8 Canali Ibrido Wizensense Penta-brid 5M-N

### Descrizione

**WizSense XVR5108HS-I3(1T)** XVR Dahua DVR 8 Canali Penta-brid (**HDCVI – AHD – TVI – CVBS – IP**) con risoluzione di registrazione fino a 5M-N e compressione video fino a **AI Coding (superiore al H.265+)** – **Supporto telecamere HDCVI fino a 5MP e telecamere IP fino a 6MP**, 1HDMI e 1 VGA 1080p, 2 USB 2.0, RS485 per controllo PTZ. SATA Audio/Video, 1 ingresso + 1 uscita audio. Compatibile ONVIF, **Protezione Perimetro, Riconoscimento facciale in tempo reale, SMD Plus, AI Search**

Dimensioni:

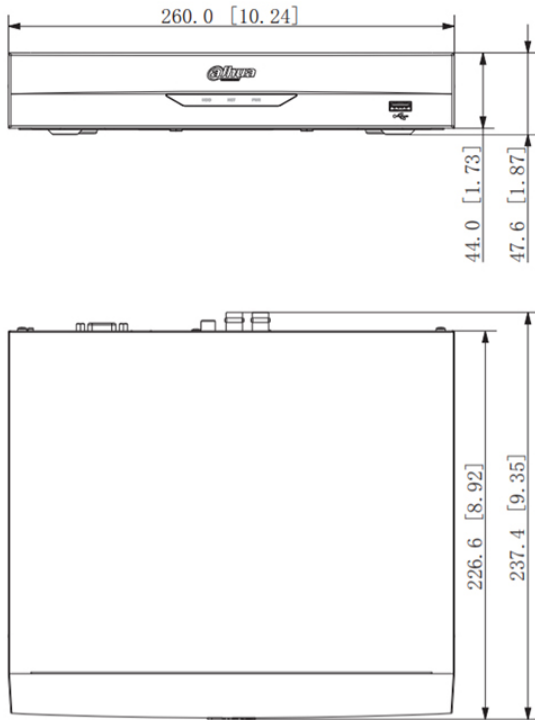

**Scheda tecnica**

www.saisystem.it

<b>System</b>	
Main Processor	Industrial-grade processor
Operating System	Embedded Linux
Operating Interface	Web; Local GUI
<b>Perimeter Protection</b>	
<b>Face Detection</b>	
Face Attributes	6 attributes

Face Detection Performance of AI by Recorder (Number of Channels) <b>Face Recognition</b>	2 channels (up to 8 face images/s eachchannel)
Face Database Capacity	Up to 10 face databases with 10,000 images.
Face Recognition Performance of AI by Recorder (Number of Channels) <b>SMD Plus</b>	2 channels
<b>Video and Audio</b>	8 channels: Secondary filtering for human and motor vehicle , reducing false alarms caused by leaves, rain and lighting condition change
SMD Plus by Recorder	
Analog Camera Input	8 BNC ports, supports HDCVI/AHD/TVI/CVBS auto-detect
Camera Input	<p>1. CVI: 5MP @20fps, 5MP @25fps, 5MP @10/12.5fps, 4MP @25/30fps, 1080p @25/30fps, 720p @50/60fps, 720p @25/30fps.</p> <p>2. TVI: 5MP @20fps, 4MP @25/30fps, 1080p @25/30fps, 720p @25/30fps.</p> <p>3. AHD: 5MP @20fps, 4MP @25/30fps, 1080p @25/30fps, 720p @25/30fps</p>

Dual-stream	Yes
Video Bit Rate	Max bit rate: 144 kbps 5MP Mode: 4-ch 5MP@(1-6fps); other channels
Audio Sampling	5M-N@(1-12fps) 8 KHz, 16 bit
Audio Bit Rate	5M-N Mode: All channel 5M-N@(1-12fps);4M-N, 64 kbps 1080p@(1-15fps); 1080N, 720p, 960H, D1,CIF@(1-25/30fps)
Encoding Capacity	Sub stream: D1, CIF@(1-15fps)
Video Output	1 HDMI, 1 VGA VGA: 1920 x 1080, 1280 x 1024, 1280 x 720 HDMI: 1920 x 1080, 1280 x 1024, 1280 x 720 When IP extension mode not enabled: 1/4/8/9
Multi-screen Display	When IP extension mode enabled: 1/4/8/9/16
Third-party Camera Access <b>Compression Standard</b>	ONVIF; Panasonic; Sony; Axis; Arecont; Samsung
Video Compression	AI Coding; Smart H.265+; H.265; Smart
Audio Compression	H.264+; H.264 G.711a; G.711u; PCM
<b>Network</b>	
Page 4	HTTP; HTTPS; TCP/IP; IPv4; IPv6; RTSP; SAISYSTEM - Via Torino 46/C - 10040 - Druento (TO) - Tel. 011.994.15.40 UDP; NTP; DHCP; DNS; SMTP; UPnP; IP Filter; FTP; DDNS; Alarm Server; P2P; Auto

Mobile Phone Access	iOS; Android
Interoperability	ONVIF 22.12(Profile T; Profile S; Profile G);
Browser	CGI; SDK Chrome; Firefox; IE
Network Mode	Single-address mode
<b>Recording Playback</b>	
Record Mode	General; motion detection; intelligent; alarm; POS
Backup Method	1/4/9
Recording Playback	USB device and network is selected in AI Mode.
Playback Mode	Instant playback; general playback; event playback; tag playback; smart playback (face and motion detection)
<b>Alarm</b>	
General Alarm	Motion detection; alarm box; camera external alarm; network alarm; PIR alarm
	Error (no disk, disk error, low space, low quota space; network disconnection; IP conflict; MAC conflict; video loss; video tampering; camera profile
Intelligent Alarm	function
Alarm Linkage	Record; snapshot (panoramic); IPC external alarm output; audio; buzzer; log, preset; email

<b>Ports</b>	
Audio Input Audio Output	1-channel RCA 8-channel BNC (Coaxial Audio) 1-channel RCA
Two-way Talk	Yes (share the same audio input with the first channel)
RS-485 HDD Interface	1 SSD:1TB(replaceable with 256 GB or 512 GB) Port, for PTZ control Stores for 11 days under default settings.
USB	2 (1 front USB 2.0 port, 1 rear USB 2.0 port)
HDMI	1
VGA	1
Network Port	1 (10/100 Mbps Ethernet port, RJ-45)
<b>General</b>	
Power Supply	12 VDC, 2 A
Power Consumption	<7 W (with SSD)
Net Weight	0.97 kg (2.14 lb)
Gross Weight	1.39 kg (3.07 lb)
Product Dimensions	260.0 mm x 237.9 mm x 47.6 mm (10.24" x 9.37" x 1.87") (W x D x H)
Packaging Dimensions	333.0 mm x 89.0 mm x 315.0 mm (13.12" x 3.51" x 12.41") (W x D x H)
Operating Temperature	-10 °C to +55 °C (+14 °F to +131 °F)

Storage Temperature	-20 °C to +60 °C (-4 °F to +140 °F)
Operating Humidity	93% (RH)
Installation	Rack or desktop
Certifications	CE: CE-LVD: IEC 62368-1 CE-EMC: EN 61000-3-2, EN 61000-3-3, EN 55032, EN 50130, EN 55024

[www.saisystem.it](http://www.saisystem.it)